


OPTION 3006

Isolated Options (Analog Output / RS232 / RS485)

This is ordered with option 3002, 3003, 3007 or 3013. It provides a minimum of 1500V isolation between input and output signal. Wiring connections are different for these isolated options.

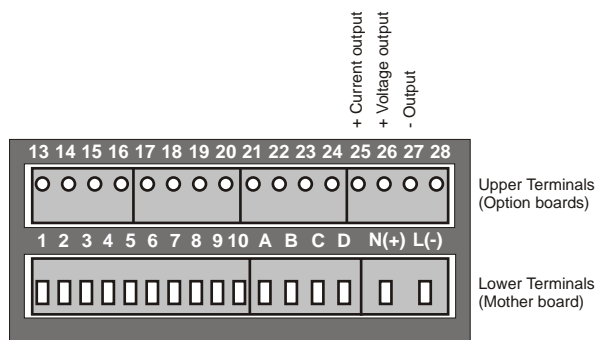

- This option is recommended for high voltage or current applications.
- Use this option if you are experiencing ground loop problems.
- The standard AC instrument is isolated from supply.



WARNING: The standard instrument has
A common ground for input,
Communications and output.



P O Box 418, Honeydew 2040 South Africa
21 Precision Street, Kyasand Randburg.
Telephone: +27 11 462-1920
Telefax: +27 11 462-1958
email: info@instrotech.co.za
web: www.instrotech.co.za

