


# OPTION 3017P

## Three Alarm Setpoints (Solid State Relays)

This option provides three alarm setpoints with solid state relays. This option board slots into the upper slot of the panel meter box. The upper terminals are clearly numbered 13-28 to differentiate them from the lower terminals. Only normally open contacts are provided, which means that should the contacts be closed and the power fails, they will revert to a normally open condition. The relays are rated at 400V AC /DC @ 0.5A. Visual LED alarm indication is provided on the panel meter front.

- Relay Rating: 400 AC or DC at 0.5A (pf=1)
- On most units this option is fitted to the main PCB on the bottom terminals.
- One common is used for both relays.
- Visual Alarm LED on front panel.
- User adjustable from front keypad
  - Setpoint Value
  - No, NC
  - Hi, Lo Alarm
  - Delay before relay will turn on
  - Hysteresis.

NOTE: Interposing relays recommended for heavy duty applications.

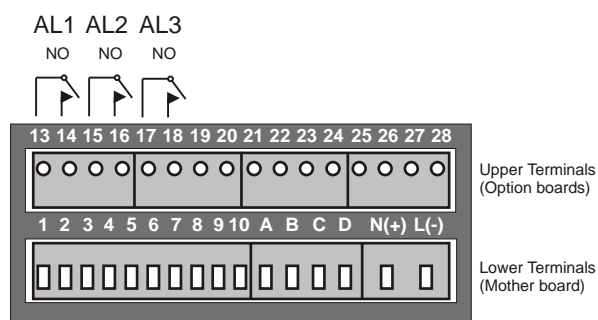

P O Box 418, Honeydew 2040 South Africa  
21 Precision Street, Kwasand Randburg.  
Telephone: +27 11 462-1920  
Telefax: +27 11 462-1958  
email: [info@instrotech.co.za](mailto:info@instrotech.co.za)  
web: [www.instrotech.co.za](http://www.instrotech.co.za)