


OPTION 3018P

Four Alarm Setpoints (Solid State Relays)

- Relay Rating: 400 AC or DC at 0.5A (pf=1)
- On most units this option is fitted to the main PCB on the bottom terminals.
- One common is used for both relays.
- Visual Alarm LED on front panel.
- User adjustable from front keypad
 - Setpoint Value
 - No, NC
 - Hi, Lo Alarm
 - Delay before relay will turn on
 - Hysteresis.

NOTE: Interposing relays recommended for heavy duty applications.

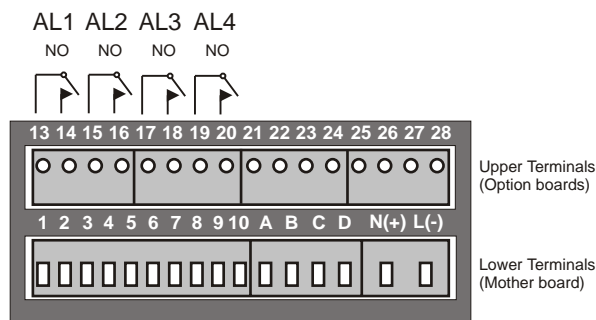

P O Box 418, Honeydew 2040 South Africa
21 Precision Street, Kyasand Randburg.
Telephone: +27 11 462-1920
Telefax: +27 11 462-1958
email: info@instrotech.co.za
web: www.instrotech.co.za

